



4M Transformer

You can rest assured to buy vehicle components from JASN factory and we will offer you the best after-sale service and timely delivery. The PN TM0607SR provide 4M Transformer speed rate for single channel design.

Model:TM0607SR

JASN is China manufacturer & supplier who mainly produces 4M Transformer with many years of experience. Hope to build business relationship with you.

Feature

8 mm min creepage and clearance distance between PRI&SEC

Coplanarity:0.1[.004]Max

Reinforced insulation for a primary circuit at a working voltage of 250Vac.

Overvoltage category II, Pollution Degree 2, up to 2km above sea level

Reinforced insulation for a primary circuit at a working voltage of 400Vac up to 2km above sea level

Comply with RoHS requirements.





Operating temperature range:-40℃ to +125℃.

Electrical Specifications @ 25℃

PAPAMETER	TEST CONDITIONS	VALUE
D.C.RESISTANCE 1-3	@25℃	0.419 ohms max
D.C.RESISTANCE 6-4	@25℃	0.335 ohms max
INDUCTANCE 1-3	100KHZ 100 mVac.	340 uH min
Working Voltage	/	250VAC
Hi-POT 1-6	5000Vrms/0.5mA/ 60 sec	6250Vrms/0.5mA/1 Sec
TURNS RATIO	6-4:1-3	1.1CT:1CT±2%

Schematic

Mechanical

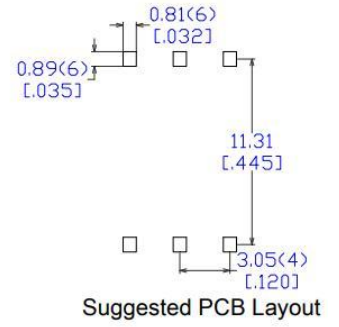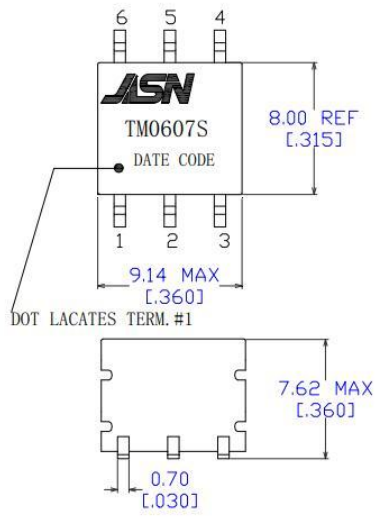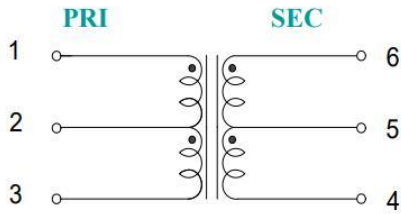

Unit: mm (inch)

Unless otherwise specified, all tolerances are ± 0.25